



DMP 336

Industrial Pressure Transmitter for Technical Gases and H₂ Applications

Welded, Dry
Stainless Steel Sensor

accuracy according to IEC 61298-2:
0.5 % FSO



Nominal pressure

from 0 ... 16 bar up to 0 ... 1000 bar

Output signal

2-wire: 4 ... 20 mA
others on request

Special characteristics

- ▶ media wetted parts of special stainless steel
- ▶ insensitive to pressure peaks
- ▶ high overpressure capability

Optional version

- ▶ IS-version zone 0
Ex ia = intrinsically safe for gases and dusts
- ▶ SIL 2-according to IEC 61508 / IEC 61511
- ▶ oil and grease free according to ISO 15001 (e.g. for oxygen applications)

The industrial pressure transmitter DMP 336 was especially developed for hydrogen applications and can also be used with other technical gases (e.g. oxygen).

This is achieved by using an alloy based on 316L which prevents hydrogen embrittlement of the media-wetted parts. Level of hydrocarbon and particle contamination are significantly reduced by special treatment during production and cleaning.

An IS- version is optionally available for explosion-protected applications zone 0 / 20.

Preferred areas of use are



Technical gases



Hydrogen



Fuel cell



Medical technology



DMP 336

Industrial Pressure Solutions Ltd | 6 Fortuna Court | Calleva Park | Aldermaston | RG7 8UB | United Kingdom
W: www.stork-solutions.com | T: +44 (0)118 237 1606

Technical Data

Company number: 10906801 | VAT Number: GB269597140 | Documents are subject to change without notice

Input pressure range											
Nominal pressure gauge	[bar]	16	25	40	60	100	160	250	400	600	1000
Overpressure	[bar]	50	50	80	120	200	320	500	800	1200	1500
Burst pressure $\geq$	[bar]	125	125	200	300	500	800	1250	2000	2000	3000 ¹
Vacuum resistance		unlimited									

¹ UL confirmed max. burst pressure 2420 bar

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / $V_S = 8 \dots 32 V_{DC}$
Option IS-protection	2-wire: 4 ... 20 mA / $V_S = 10 \dots 28 V_{DC}$

Performance	
Accuracy ²	$\leq \pm 0.5 \% \text{ FSO}$
Permissible load	$R_{\max} = [(V_S - V_{S \min}) / 0.02 \text{ A}] \Omega$
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / k Ω
Long term stability	$\leq \pm 0.2 \% \text{ FSO} / \text{year}$ at reference conditions
Response time	$\leq 10 \text{ msec}$

² accuracy according to IEC 61298-2 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (offset and span)	
Thermal error	$\pm 0.2 \% \text{ FSO} / 10 \text{ K}$
in compensated range	-25 ... 85 °C

Permissible temperatures	
Permissible temperatures	medium: -40 ... 125 °C electronics / environment: -40 ... 100 °C storage: -40 ... 85 °C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability	
Vibration	20 g RMS / 10 ... 2000 Hz according to DIN EN 60068-2-6
Shock	500 g / 1 msec half sine according to DIN EN 60068-2-27

Materials	
Housing	stainless steel 316L (1.4404)
Pressure port, sensor, diaphragm	stainless steel 316L (1.4435)
Seals	none (welded)
Media wetted parts	pressure port, sensor, diaphragm

Explosion protection	
Approvals DX19-DMP 336	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T 135°C Da
Safety technical maximum values	$U_i = 28 V_{DC}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C_i \approx 0 \text{ nF}$, $L_i \approx 0 \mu\text{H}$, the supply connections have an inner capacity of max. 27 nF
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -20 ... 70 °C
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$

Miscellaneous	
Option SIL2 version	according to IEC 61508 / IEC 61511
Current consumption	max. 25 mA
Weight	approx. 140 g
Installation position	any
Operational life	$p_N \leq 600 \text{ bar}$: 100 million load cycles $p_N > 600 \text{ bar}$: 10 million load cycles
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) ³
ATEX Directive	2014/34/EU

³ This directive is only valid for devices with maximum permissible overpressure > 200 bar.

Purity regarding residual particles / greases for oxygen applications	
Oil and grease free version	residual particles: no particles > 100 μm (based on 10 dm ²) residual greases: residual grease content < 0.2 mg/dm ²


DMP 336

Industrial Pressure Transmitter

Technical Data

Wiring diagram

2-wire-system (current)

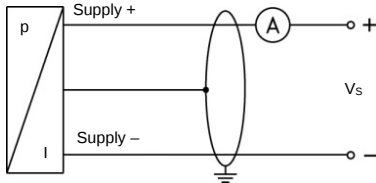


Pin configuration



Electrical connections	ISO 4400	M12x1 / metal (4-pin)	cable colours (IEC 60757)
supply +	1	1	WH (white)
supply -	2	2	BN (brown)
Shield	ground pin (GND)	4	GNYE (green-yellow)

Electrical connections (dimensions mm / in)

standard

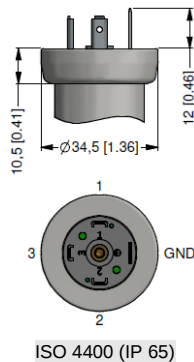


option

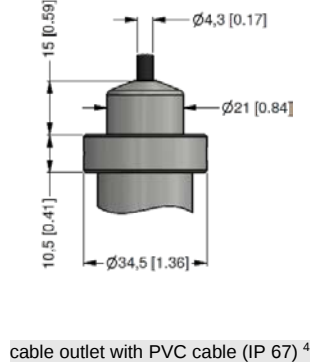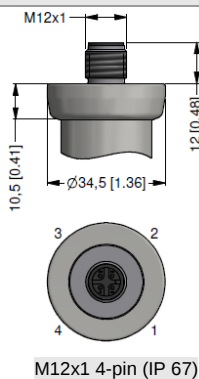



⁴ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

Mechanical connections (dimensions mm / in)

standard

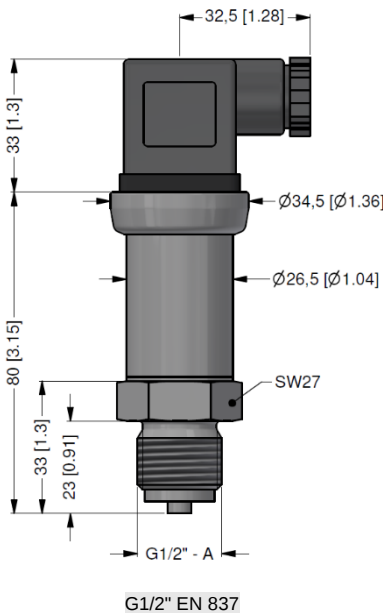

option



⇒ metric threads and different types on demand

© – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DMP 336

DMP 336

$$\boxed{}\boxed{}\boxed{} - \boxed{}\boxed{}\boxed{}\boxed{} - \boxed{} - \boxed{} - \boxed{}\boxed{}\boxed{} - \boxed{}\boxed{}\boxed{} - \boxed{} - \boxed{}\boxed{}\boxed{}$$

Pressure																			
	gauge	2	1	5															
Input		[bar]																	
	16				1	6	0	2											
	25				2	5	0	2											
	40				4	0	0	2											
	60				6	0	0	2											
	100				1	0	0	3											
	160				1	6	0	3											
	250				2	5	0	3											
	400				4	0	0	3											
	600				6	0	0	3											
	1000				1	0	0	4											
	customer				9	9	9	9											consult
Output																			
	4 ... 20 mA / 2-wire								1										
	intrinsic safety 4 ... 20 mA / 2-wire								E										
	SIL2: 4 ... 20 mA / 2-wire								1S										
	SIL2: intrinsic safety 4 ... 20 mA / 2-wire								ES										
	customer								9										consult
Accuracy																			
	0.5 % FSO								5										
	customer								9										consult
Electrical connection																			
	male and female plug ISO 4400								1	0	0								
	male plug M12x1 (4-pin) / metal								M	1	0								
	cable outlet with PVC cable (IP67) ¹								T	A	0								
	customer								9	9	9								consult
Mechanical connection																			
	G1/2" EN 837								2	0	0								
p _N ≤ 600 bar	G1/4" EN 837								4	0	0								
	1/4" NPT								N	4	0								
	customer								9	9	9								consult
Seal																			
	without (welded version)								2										
	customer								9										consult
Special version																			
	standard												0	0	0				
	oil-and grease free -oxygen												0	0	7				
	customer												9	9	9				consult

¹ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C); others on request